

WENDEN

7-inch TFT LCD
Fish Finder

Model **FV-107**

Enjoy your fishing




- 7" color TFT LCD screen
- Dual frequency 50 & 200kHz
- 400W RMS output power
- Multiple display modes & alarms available
- Automatic range selection

7-inch TFT LCD Fish Finder **FV-107**

Specifications

Model	FV-107
Display	7" color LCD - 480x240 dot
Presentation	8 color gradation and 12 color gradation
Brightness control	10 levels
Range	Auto or manual: 0 to 400m,
Minimum detect range	0.3 M
Frequency	200kHz/50kHz (dual frequency)
Power output	400W RMS (3200W PEP)
Functions	High Frequency, Low Frequency, Dual Frequency, Solitaire, bottom lock, bottom zoom, zoom, bottom follow zoom
Shift zoom	X1, X2, X4, X8, 4 steps
Gain (sensitivity)	40 steps
Depth unit	Meter
Interference rejection	Low, high, off
STC	Short, long, off
Image speed	Stop, 1/4, 1/2, 1/1, 2/1, 4/1
NMEA port	2 output ports
NMEA output	SDDBT, SDDPT, SDMTW, SDAPB, SDBWC, GPGGA, GPRMC
Alarm fishing	Fish, shallow,
Input voltage	DC 10-36V
Power consumption	< 20W (approx)
Water resistance	IP52, IEC 60529
Ambient conditions	-0°C to +50°C. IEC 60945

Connections


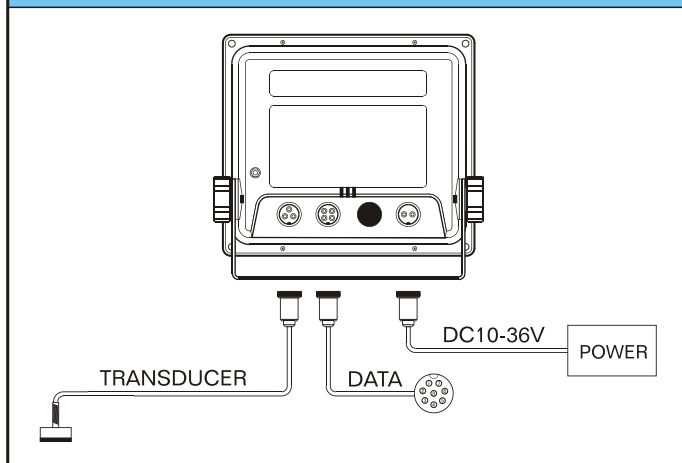


Equipment list

Standard equipments	Display unit and mounting bracket	1 set
	Power cable, Bolter, User manual, Quick reference	1 set
Essential equipments	Transducer	1 pc
Optional equipments	NMEA output cable with plug	1 pc

Dimension drawings

Unit : mm

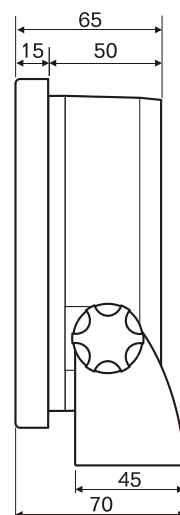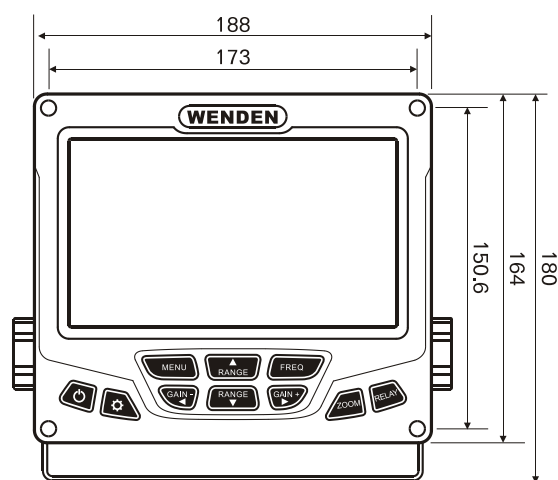

Wenden Radio Co., Ltd.

No.71 Tsueiheng N. Road, Kaohsiung 806, Taiwan

T E L : + 886-7-8213101

F A X : + 886-7-8418649

E-Mail : sales@wenden.com.tw

www.wenden.com.tw



NOTE

All specifications are provisional and Subject to change without notice or obligation

For details, please contact: